


Panel for temporary roads 300/200/21,5

61 Uherský Ostroh

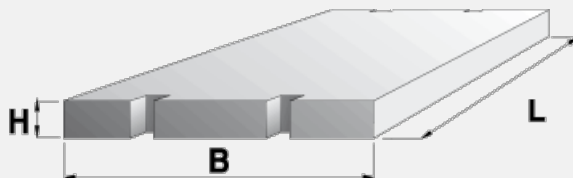

Trademark	Dimensions (cm)			Concrete Class	Volume (m ³)	Weight (kg)
	L	B	H			
IZD 200/19	300	200	21,5	C 30/37-XF4	1,2900	3200

Usage:

It serves as a temporary road surface of site roads and traffic diversions of public roads. These panels are intended for reuse, but continuous use is not excluded. As base course a non-bond base course can be used, for long-term or continuous usage also a reinforced base course.

The panels are applicable for a traffic load by design axle 100 kN and with passage number 1.5 x 10⁵.

The minimum thickness of base course arises from the modulus of elasticity of subgrade 20 (30, 45) MPa, at load-bearing capacity of the subgrade characterized by modulus of subgrade reaction $k = 60$ (90, 120) MN/cu. m and is given in the type document „Reinforced Concrete Panels for Temporary Roads“ issued by Study and Standardization Institute in 1991.