


## Road panel 300/100/15

61 Uherský Ostroh

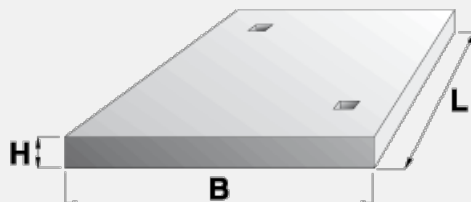

Trademark	Dimensions (cm)			Concrete Class	Volume (m <sup>3</sup> )	Weight (kg)
	L	B	H			
IZD 110/100	300	100	15	C 25/30-XF1	0,4478	1100

### Usage:

For temporary site roads, concrete areas, parking places and the like. These panels are intended for disposability. The panels are applicable for a traffic load by design axle 100 kN and with passage number less than  $1.0 \times 10^4$ . The minimum thickness of base course arises from the modulus of elasticity of subgrade 20 (30, 45) MPa, at load-bearing capacity of the subgrade characterized by modulus of subgrade reaction  $k = 60$  (90, 120) MN/cu. m and is given in the type document. „Reinforced Concrete Panels for Temporary Roads“ issued by Study and Standardization Institute in 1991.