


Tram panel DZP 180/396-3 triple groove

61 Uherský Ostroh

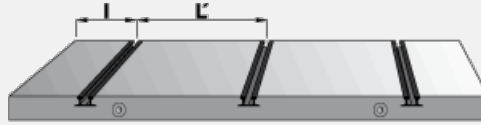

Trademark	Dimensions (cm)					Concrete Class	Volume (m3)	Weight (kg)
	L	B	H	L_1	L_2			
IZX 27/10	396	180	20	135	63	C 30/37-XF4	1,4256	3520

Usage:

For laying and fastening of railroad spans of tram roads. The grooves formed by a pair of rails for mining and field railways 80/14 serve for fastening of rails type NP 3; NP 4; NT 1; NT 2. The panels designated No. 3, 4 serve for laying of tram railroad spans on crossings and in curves up to min. $R = 25$ m.