


## Tram panel DZP 220/396-3-KK

61 Uherský Ostroh

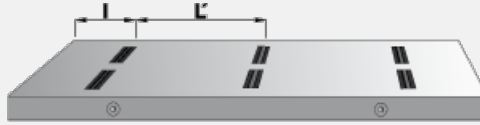

Trademark	Dimensions (cm)					Concrete Class	Volume (m3)	Weight (kg)
	L	B	H	L_1	L_2			
IZX 135/19	396	220	20	132,3	65,7	C 30/37-XF4	1,7424	4260

### Usage:

For laying and fastening of railroad spans of tram roads of gauge 1,435 mm.

The grooves formed by pairs of shortened rails for mining and field railways 80/14 serve for fastening of rails type NP 3; NP 4; NT 1; NT 2.