


Rail pan VK-3

41 Litice

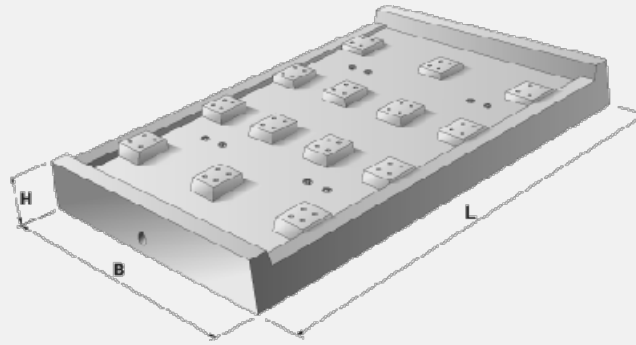

| Trademark | Dimensions (cm) | | | Concrete Class | Volume (m3) | Weight (kg) |
|-----------|-----------------|-----|----|----------------|-------------|-------------|
| | L | B | H | | | |
| AZP 06-19 | 672 | 298 | 70 | C 30/37-XF4 | 8,9150 | 22287 |

Usage:

Rail pan VK-3 is intended for collecting of solid and liquid waste after inner and outer cleaning of carriages of ČD on 1435 mm gauge rails. Railway vehicles are in motion on a rail with normal gauge, which is formed by a rail S49 on inclined sole-plates S4. The cleaning equipment is in motion outside the rail on a separate rail S 49, bedded on flat soleplates S4pl with a distance between lines of 4700 mm. The pan is set into cement mortar about 30 mm thick on a carrying concrete-steel soleplate. The pan bottom is inclined in falling 2 % to one side. Dissolved impurities are drained away to the conducting drain. It is advised to paint the pan with a protection coat according to collected impurities.