


## Inner paving panel

31 Doloplazy

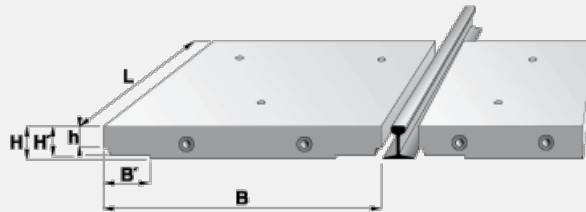

Trademark	Dimensions (cm)						Concrete Class	Volume (m3)	Weight (kg)
	L	B	H	H_1	H_2	B_1			
IZX 512/10	123	128	15	13,5	10	21,5	C 35/45-XF4	0,2201	585

### Usage:

For paving of railroad crossings of 3rd class roads and lower, of field roads and for paving of service tracks and siding rails with gauge of 1,435 mm. They are laid on through-put wood supports along rails inside the track. The panels are equipped with holes for junction by inserting of short bolts for the purpose of increasing stability of elements. They are designed for load 110 kN per axle.