


## Custom manufacturing of runs of stairs, stair landings, plates and fliers

41 Litice

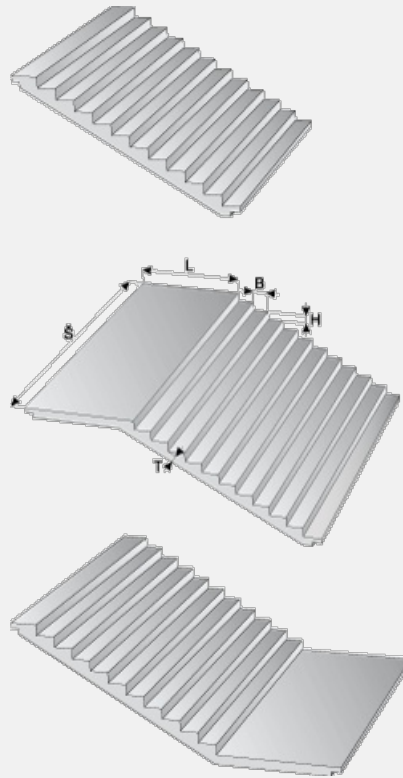

Trademark	Dimensions (cm)		
	L	B	H
ZV 007	*	*	*

### Usage:

Prefab blocks of direct runs of stairs including fliers and stair landings are a traditional part of assembled wall and shell systems of civic and industrial buildings. Their use is suitable also for the constructions made by means of brick or monolithic technology. Their main benefit is in the speed of assembly and immediate loadability.

The maximum number of fliers of the runs of stairs is 20 (riser height max. 200 mm, flier width max. 350 mm). Stair landing can be made at the expense of the number of fliers, slant angle is approx. 30 degrees.